


Product Data Sheet



Product name:	Sausage Belt (Double moulded-FDA)
Standard Compound:	Polyurethane
Color:	White (special colors available)
Tension member:	Stainless steel
Tension member properties:	Low elongation
	Outstanding reliability
	High tensile strength

Profile:	T5	T5	T5	T5	T10	T10	
Length:	330	510	625	840	370	840	mm
	Tolerance: $\pm 0,5$	Tolerance: $\pm 0,5$	Tolerance: $\pm 0,5$	Tolerance: $\pm 0,5$	Tolerance: $\pm 0,5$	Tolerance: $\pm 0,5$	mm
Width:	32	32	32	32	32	32	mm
	Tolerance: $\pm 0,3$	Tolerance: $\pm 0,3$	Tolerance: $\pm 0,3$	Tolerance: $\pm 0,3$	Tolerance: $\pm 0,3$	Tolerance: $\pm 0,3$	mm
Coating Hardness:	30-80	30-80	30-80	30-80	30-80	30-80	ShA
	Tolerance: ± 2	Tolerance: ± 2	Tolerance: ± 2	Tolerance: ± 2	Tolerance: ± 2	Tolerance: ± 2	ShA
Hardness on the teeth side:	92	92	92	92	92	92	ShA
	Tolerance: ± 2	Tolerance: ± 2	Tolerance: ± 2	Tolerance: ± 2	Tolerance: ± 2	Tolerance: ± 2	ShA

Properties:	Made of environmentally friendly FDA Polyurethane
	Outstanding abrasion resistant
	Working temperature -25 °C / +80 °C
	Good flexibility
	Excellent impact and chemical resistance

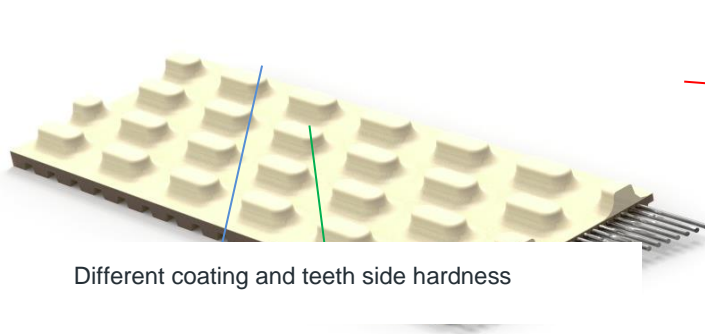

Different coating and teeth side hardness

